



## Advances in silicon nanophotonics

Hvam, Jørn Märcher; Pu, Minhao

*Publication date:*  
2012

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*  
Hvam, J. M., & Pu, M. (2012). *Advances in silicon nanophotonics*. Abstract from Fifth International Conference on Optical, Optoelectronic and Photonic Materials and Applications - ICOOPMA 2012, Nara, Japan.

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

# Advances in silicon nanophotonics

Jørn M. Hvam\* and Minhao Pu

DTU Fotonik, Department of Photonics Engineering, Technical University of Denmark  
Oersteds Plads 343, DK-2800 Kgs. Lyngby, Denmark

\*e-mail: jmhv@fotonik.dtu.dk

Silicon has long been established as an ideal material for passive integrated optical circuitry due to its high refractive index, with corresponding strong optical confinement ability, and its low-cost CMOS-compatible manufacturability. However, the inversion symmetry of the silicon crystal lattice has been an obstacle for a simple realization of electro-optic modulators, and its indirect band gap has prevented the realization of efficient silicon light emitting diodes and lasers. Still, significant progress has been made in the past few years.<sup>1</sup> Electro-optic modulators based on the free carrier plasma effect have been tested up to 40 Gbit/s,<sup>2</sup> and hybrid evanescent silicon lasers have been realized both in the form of distributed feed-back lasers<sup>3</sup> and micro-disk lasers.<sup>4</sup> For enhancing the impact of silicon photonics in future ultrafast and energy-efficient all-optical signal processing, e.g. in high-bit-rate optical communication circuits and networks, it is vital that the nonlinear optical effects of silicon are being strongly enhanced.<sup>5</sup> This can among others be achieved in photonic-crystal slow-light waveguides<sup>6</sup> and in nano-engineered photonic-wires<sup>7</sup> (Fig. 1). In this talk I shall present some recent advances in this direction. The efficient coupling of light between optical fibers and the planar silicon devices and circuits is of crucial importance. Both end-coupling<sup>8</sup> (Fig. 1) and grating-coupling<sup>9</sup> solutions will be discussed along with polarization issues<sup>10</sup>. A new scheme for a hybrid III-V/silicon laser will also be discussed briefly.<sup>11</sup>

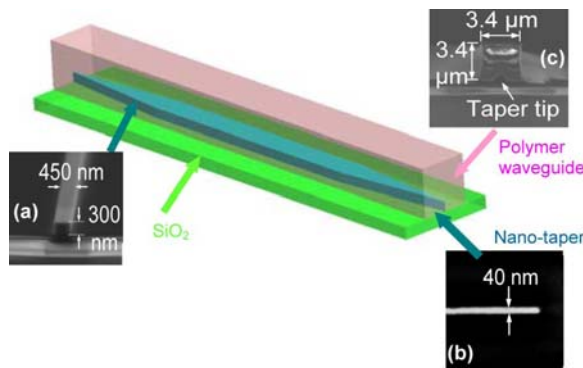


Fig.1. Schematic drawing of a nano-engineered silicon waveguide with SEM pictures of (a) cross section of the silicon waveguide, (b) top view of the silicon nano-taper tip, and (c) cross-section view of the nano-taper coupler with cladding polymer waveguide.

## References

- 1) See e.g. Nature Photonics (Focus Issue) **4**, 491-578 (2010).
- 2) L.Liao, A. Liu, d.Rubin, J. Basak, Y. Chetrit, H. Nguyen, R. Cohen, N. Izhaky, and M. Paniccia, Electron. Lett **43**, 1196 (2007).
- 3) A.W. Fang, E. Lively, Y.H. Kuo, D. Liang, and J.E. Bowers, Opt. Express **16**, 4413 (2008).
- 4) J. Van Campenhout, P. Rojo-Romeo, P. Regreny, C. Seassal, D. Van Thourhout, S. Verstuyft, L. Di Cioccio, J.-M. Fedeli, C. Lagahe, and R. Baets, Opt. Express **15**, 6744 (2007).
- 5) L.K. Oxenløwe, M. Galili, M. Pu, H. Ji, H. Hu, K. Yvind, J.M. Hvam, H.C.H. Mulvad, E. Palushani, J.L. Areal, A.T. Clausen, and P. Jeppesen, IEEE J. Sel. Topics in Quantum Electron. **17**, issue 6 (2011).
- 6) J. Li, L. O'Faolain, I.H. Rey, and T.F. Krauss, Opt. Express **19**, 4458 (2011).
- 7) H. Ji, M. Pu, H. Hu, M. Galili, L.K. Oxenløwe, K. Yvind, J.M. Hvam, and P. Jeppesen, IEEE J. Lightwave Technol. **29**, 426 (2011).
- 8) M. Pu, L. Liu, H. Ou, K. Yvind, and J.M. Hvam, Optics Commun. **283**, 3678 (2010).
- 9) L. Liu, M. Pu, K. Yvind, and J.M. Hvam, Appl. Phys Lett. **96**, 051126 (2010).
- 10) L. Liu, Y. Ding, K. Yvind, and J.M. Hvam, Opt. Express **19**, 12646 (2011).
- 11) I.-S. Chung and J. Mørk, Appl. Phys. Lett. **97**, 151113 (2010).